netopia
BROADBAND WITHOUT BOUNDARIES™

Netopia® 3-D Reach™ Wi-Fi Gateways

Models: • Netopia® 3300-Series ADSL 3-D Reach™ Wi-Fi Gateways
• Netopia® 3300-Series Broadband 3-D Reach™ Wi-Fi Gateways

3D REACH

Quickstart Guide

Checklist

Unpack your Gateway, check your package contents, and decide on a location. **Consider:**

- Place the Gateway in a spot that is easily accessible for you. You can lay it flat or mount on the wall.
- Keep the cables away from other electrical devices that may interfere with the operation of your Gateway.

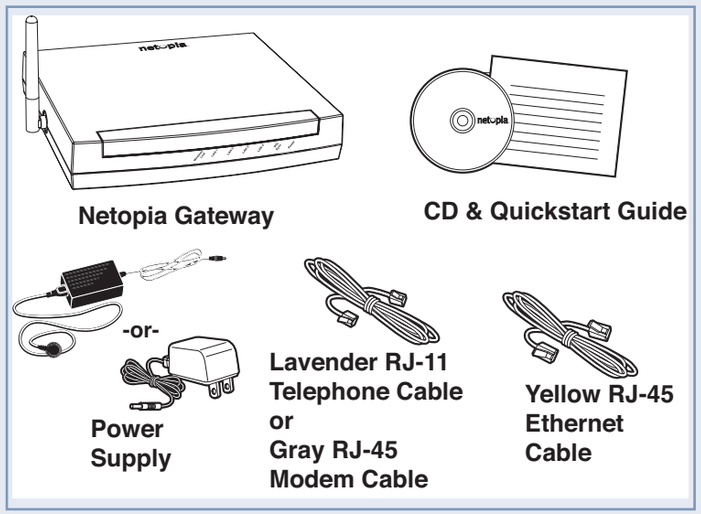

If you don't have everything, contact your supplier immediately.

Use the Netopia Installation Wizard

Note: *Note the serial number (**SN:**) of your Gateway. It is located on the label on the bottom of the Gateway below the model number. You will need the Gateway's serial number when installing wireless card(s) or adapters, or if you need to call for technical support.*

The Netopia Installation Wizard automates several tasks to get you up and running easily. You can run the Wizard on every ***Windows-based PC*** that will connect to your network, whether it is connected via Wireless, USB, or by Ethernet cable.

→Be sure to disable firewall products such as Norton Personal Firewall or McAfee Personal Firewall before running the wizard.←

1. ***Insert the CD into your CDROM drive.*** The Installation Wizard will run automatically and step through your connection installation(s).

The Welcome screen lists the tasks that you can perform with the Netopia Installation Wizard.

The second screen lets you choose which type of Netopia device you are installing, and where you are installing it.

Once you make your choice, subsequent screens will install the appropriate drivers, if required, and perform configuration tasks, depending on the type of device you are installing.

Follow the on-screen instructions.

2. **When prompted, connect a PC to any of the Ethernet "LAN" ports using the Yellow RJ-45 Ethernet cable.** Use additional standard Category 5 Ethernet cables (not supplied) to connect up to four devices.

3. **If you are installing a Netopia 3-D Reach Wireless card, use the Netopia Installation Wizard on your laptop or PC.** If you are using third-party, non-Netopia-supplied wireless adapters with your Gateway use the drivers/CD that are compatible for that wireless adapter.

When all of your connections are made, your network may look like this:

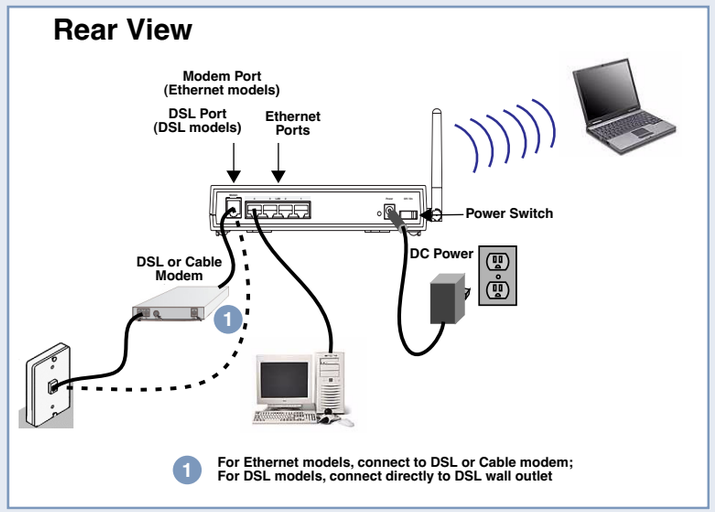
Rear View
Modem Port (Ethernet models)
DSL Port (DSL models)
Ethernet Ports
Power Switch
DC Power
DSL or Cable Modem
1
1 For Ethernet models, connect to DSL or Cable modem;
For DSL models, connect directly to DSL wall outlet

When all of your connections are made, the status LEDs on the front of your Netopia Gateway will light, according to the following diagram:

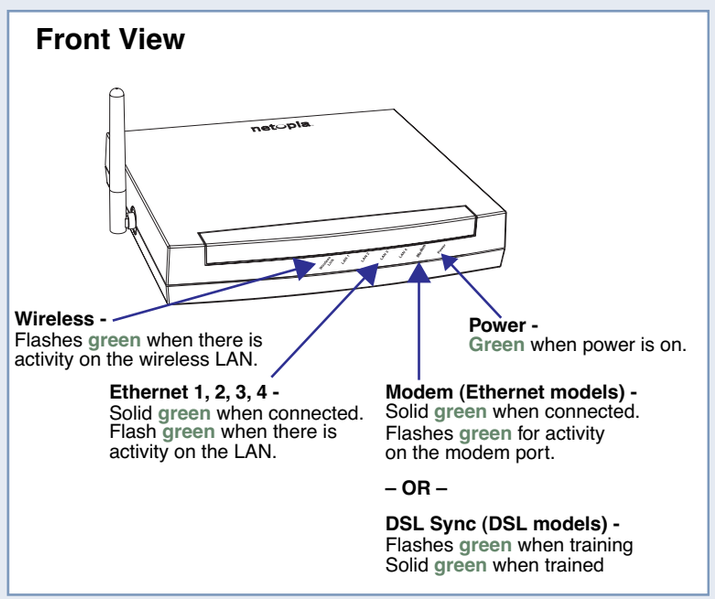
Front View
Wireless -
Flashes green when there is activity on the wireless LAN.
Power -
Green when power is on.
Ethernet 1, 2, 3, 4 -
Solid green when connected.
Flash green when there is activity on the LAN.
Modem (Ethernet models) -
Solid green when connected.
Flashes green for activity on the modem port.
– OR –
DSL Sync (DSL models) -
Flashes green when training
Solid green when trained

Configure Your Netopia Gateway

When you use the Netopia Installation Wizard, it will automatically run your Web browser at the appropriate time, and take you to your Gateway's Web page. If it fails to do this, you can access the configuration pages at any time as follows:

1. **Run a Web browser, such as Netscape Navigator or Microsoft Internet Explorer, and enter *http://192.168.1.254* in the URL Address text box. Click *Go*.**

The Gateway displays the ***Welcome*** page.

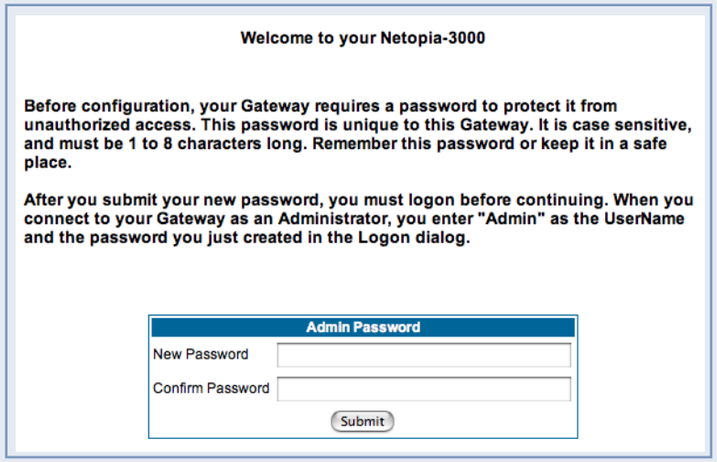
Welcome to your Netopia-3000
Before configuration, your Gateway requires a password to protect it from unauthorized access. This password is unique to this Gateway. It is case sensitive, and must be 1 to 8 characters long. Remember this password or keep it in a safe place.
After you submit your new password, you must logon before continuing. When you connect to your Gateway as an Administrator, you enter "Admin" as the UserName and the password you just created in the Logon dialog.
Admin Password
New Password
Confirm Password
Submit

2. **Create a new security password that you will use to access the Gateway.**

The new password will take effect when you click ***Submit***. Then, when you log into the Gateway again, use the username ***admin***, and the password that you just created.

Log in to the Gateway by typing the username ***admin*** and the password you just created.

Ethernet Models:

Congratulations! Your connection is up and running and you should be able to browse the Internet.

DSL Models:

There is just one more step for a DSL connection:

3. **The Gateway displays the Quickstart page.**

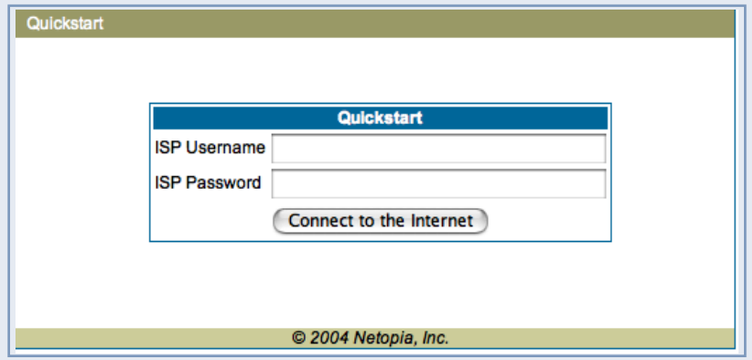

Enter the ***ISP Username*** (example: *jsurfer@isp.net*) and ***ISP Password*** supplied by your Internet Service Provider.

Click ***Connect to the Internet***.

Congratulations! Your connection is up and running and you should be able to browse the Internet.

If you have any questions or run into any difficulty, contact your service provider's customer assistance center. If you are connected, answers to many frequently asked product-related questions are also available on-line at: http://www.netopia.com/support

Netopia Part Number: 6180100-00-02

Copyright 2004, Netopia, Inc. Netopia and the Netopia logo are registered trademarks belonging to Netopia, Inc., registered U.S. Patent and Trademark Office. Broadband Without Boundaries is a trademark belonging to Netopia, Inc. All other trademarks are the property of their respective owners. All rights reserved.